

Self Priming Centrifugal Pumps



Models
13G1-GX160 and 13G1-1B20

Size 3" x 3"



PUMP SPECIFICATIONS

Size: 3" x 3" (76 mm x 76 mm) NPT - Male.

Casing: Powder Coated Aluminum Alloy 380.

Maximum Operating Pressure 67 psi (462 kPa).*

Semi-Open Type, Two Vane Impeller: Gray Iron 30.

Handles 1 3/16" (30,2 mm) Diameter Spherical Solids.

Volute Scroll: Gray Iron 30.

Seal: Mechanical, Self-Lubricated. Silicon Carbide Rotating and Stationary Faces. Fluorocarbon Elastomers (DuPont Viton® or Equivalent). Stainless Steel Cage and Spring. Maximum Temperature of Liquid Pumped 160°F (71°C).*

Flap Valve: EPDM.

Flanges: Gray Iron 30.

O-Rings: EPDM.

Fill/Drain Plugs: Plastic.

Internal Wetted Hardware: Stainless Steel.

External Hardware: Standard Plated Steel.

Standard Equipment: Strainer. Roll Cage w/Rubber Feet.

Optional Equipment: Wheel Kit w/Semi-Pneumatic Tires.

*Consult Factory for Applications Exceeding Maximum Pressure and/or Temperature Indicated.



13G1-GX160 SHOWN



HONDA GASOLINE ENGINE SPECIFICATIONS

Model: Honda GX160.

Type: Single Cylinder, Four Cycle, Air Cooled, Overhead Valve, Gasoline Engine.

Displacement: 9.9 Cu. In. (163 cc).

Carburetor: Horizontal Type.

Lubrication: Splash System.

Air Cleaner: Dual Element.

Oil Reservoir: 20 U.S. Oz. (0,6 Liter).

Fuel Tank: 0.95 U.S. Gal. (3,6 Liters).

Full Load Operating Time: 2.5 Hrs.

Starter: Rope Rewind.

Standard Equipment: Muffler w/Guard. Manual Rotary Stop Switch. Manual Choke and Throttle Control. "Oil Alert"™ Low Oil Shut Down. Transistorized Magneto Ignition.

HATZ DIESEL ENGINE SPECIFICATIONS

Model: Hatz 1B20.

EPA Tier: Tier 4.

Type: Single Cylinder, Four Cycle, Air Cooled, Diesel Engine.

Displacement: 14.8 Cu. In. (243 cc).

Lubrication: Forced Circulation.

Air Cleaner: Dry Type.

Oil Reservoir: 30.4 U.S. Oz. (0,9 Liter).

Fuel Tank: 0.79 U.S. Gal. (3,0 Liters).

Full Load Operating Time: 2.7 Hours.

Starter: Rope Rewind.

Standard Equipment: Exhaust Silencer Muffler w/Guard. 90° Exhaust Deflector. Hand Throttle and Stop Control.

HATZ PUBLISHED PERFORMANCE:

Maximum Interim Net B.H.P.

4.6 (3,4 kW) @ 3600 RPM



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.

Specification Data

SECTION 45, PAGE 544


APPROXIMATE
DIMENSIONS and WEIGHTS

SHIPPING WEIGHT:

13G1-GX160: 100 LBS. (45 KG.)


13G1-1B20: 120 LBS. (54KG.)

WHEEL KIT ADD 25 LBS. (11.3 KG.); SHIPPING CRATE
(SEPARATE) 3 CU. FT. (0,1 CU. M.)

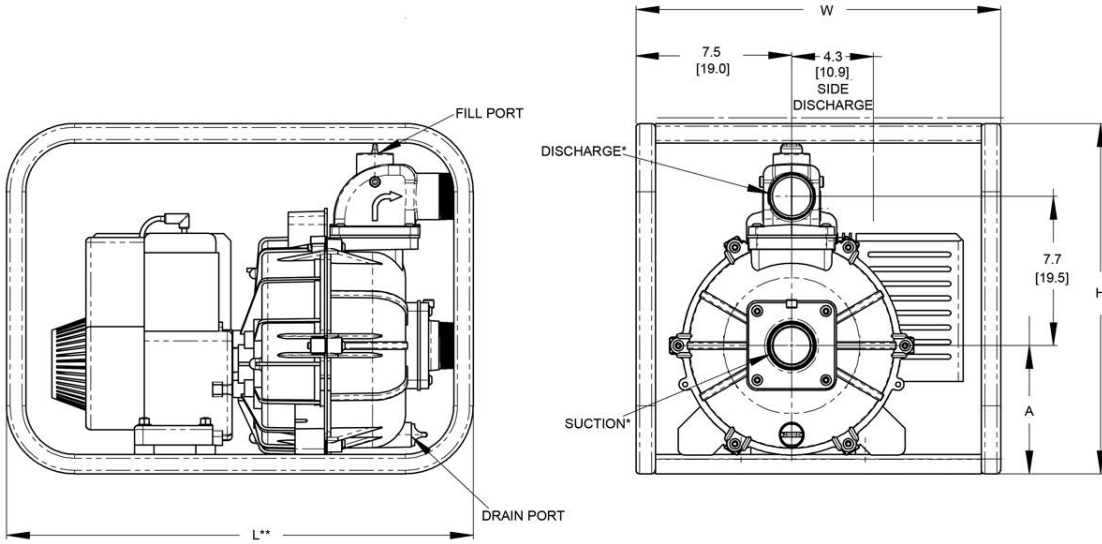

DIMENSIONS				
Model	A	L	W	H
13G1-GX160	7.4 (18,7)	24.0 (60,9)	19.5 (49,5)	19.9 (50,5)
13G1-1B20	7.9 (20,0)	24.0 (60,9)	19.5 (49,5)	19.9 (50,5)

Performance of Engine Driven Self-Priming Trash Pumps

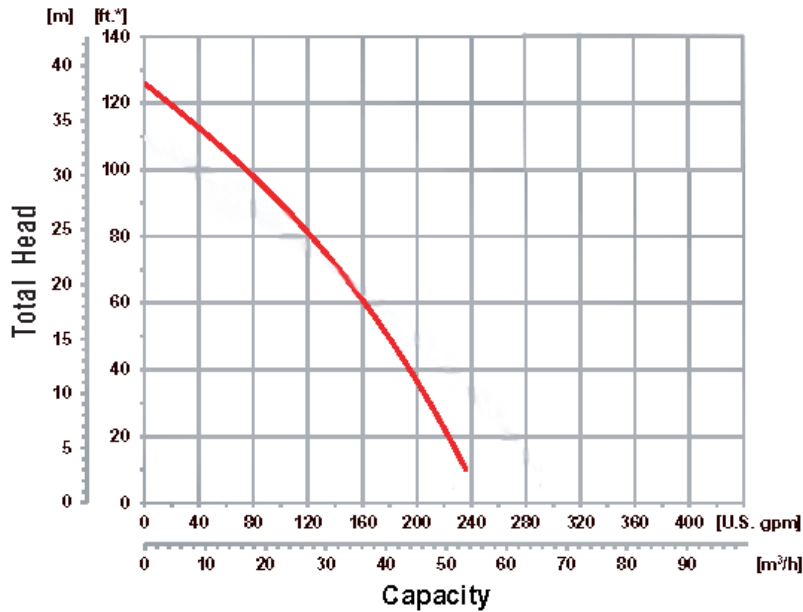

(*) Convert to psi, divide by 2.31 Liquid - Water specific gravity 1.0



GORMAN-RUPP PUMPS

www.grpumps.com

Specifications Subject to Change Without Notice

Printed in U.S.A.